


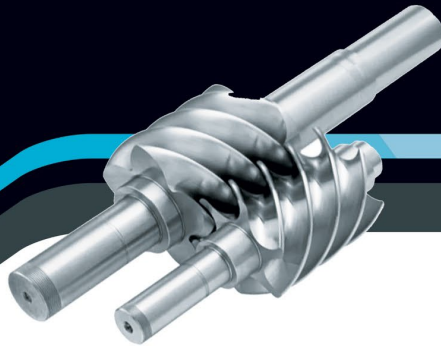

Screw Air Compressor (Direct driven)

Model	Motor Power		Pressure Bar	Air Delivery m ³ /min	Starting methods	Voltage Volt	Dimension (L*W*H) mm	Weight Kg	Air Outlet Pipe Diameter
	Kw	HP							
VM-7.5A	7.5	10	7-12	1.2-0.75	Y-Δ Start	380	1000x700x830	200	G ³ / ₄ "
VM-11A	11	15	7-12	1.8-1.1	Y-Δ Start	380	1050x750x1000	310	G ³ / ₄ "
VM-15A	15	20	7-12	2.4-1.7	Y-Δ Start	380	1050x750x1000	310	G ³ / ₄ "
VM-22A	22	30	7-12	3.8-2.9	Y-Δ Start	380	1380x850x1160	430	G1"
VM-30A	30	40	7-12	5.2-4.0	Y-Δ Start	380	1380x850x1160	540	G1"
VM-37A	37	50	7-12	6.7-5.0	Y-Δ Start	380	1500x1000x1320	680	G1 ¹ / ₂ "
VM-45A	45	60	7-12	7.4-6.0	Y-Δ Start	380	1500x1000x1320	710	G1 ¹ / ₂ "
VM-55A	55	75	7-12	10.0-7.6	Y-Δ Start	380	1800x1250x1670	1060	G2"
VM-75A	75	100	7-12	13.0-10.5	Y-Δ Start	380	1800x1250x1670	1350	G2"